




Since 1954

3317 Gilmore Industrial Blvd
Louisville, KY 40213
(502) 966-3134

www.ArcoEngineering.com
Sales@ArcoEngineering.com

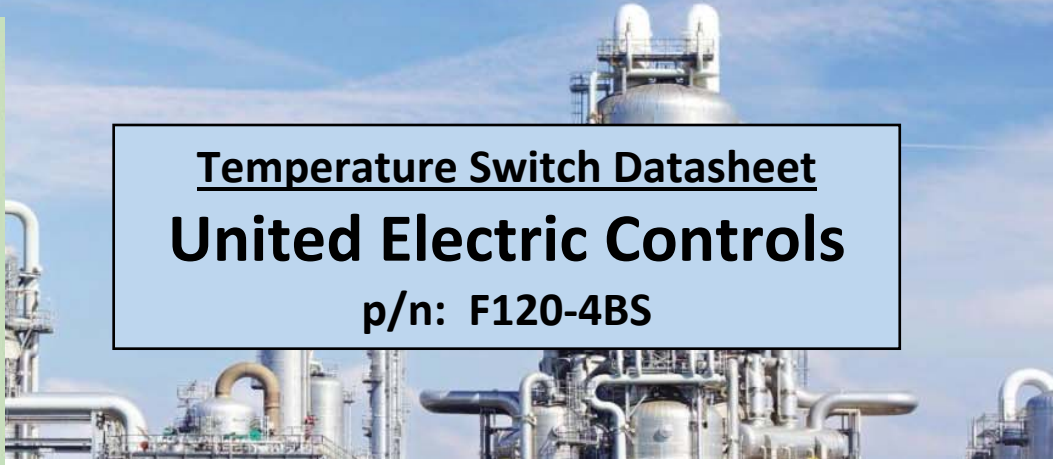

Temperature Switch Datasheet
United Electric Controls
p/n: F120-4BS

FACTORY DIRECT - AUTHORIZED DISTRIBUTOR
Contact us for: [Application Assistance](#), [Quotes](#), to [Place an Order](#)

| | |
|--|---|
| UE PART NUMBER: | F120-4BS |
| ENCLOSURE: | Class I, Division 1 and 2, Groups B, C & D Class II, Division 1 and 2, Groups E, F & G Class III Enclosure Type 4X |
| ¹ SWITCH: | Single SPDT 15A 125,250,480 VAC Resistive |
| ELECTRICAL CONNECTION: | 3/4" NPT Female |
| SET POINT ADJUSTMENT METHOD: | Internal |
| WETTED AND SENSOR TYPE: | 304SS Plain Capillary with 304SS Remote Bulb |
| SENSOR: | 3/8" O.D. x 6-3/4" Length Bulb, 6Ft. Capillary |
| ADJUSTABLE SET POINT RANGE: | (-)40 to (+)120 F |
| ² MAXIMUM TEMPERATURE: | 170 F |
| COMPLETE SPECIFICATIONS & OPTIONS: | United Electric 120 Series Product Catalog |
| | |
| ¹ See United Electric Controls catalog for further rating details and optional microswitches. | |
| ² Maximum Temperature: The maximum temperature to which a sensor may be occasionally subjected, which causes no permanent damage. The unit may require calibration. | |
| | |